



WVA SERIES




CONTROLLER - DIGITAL



STEAM NOZZLE

AQUA FLOW

WVA SERIES STEAM GENERATOR

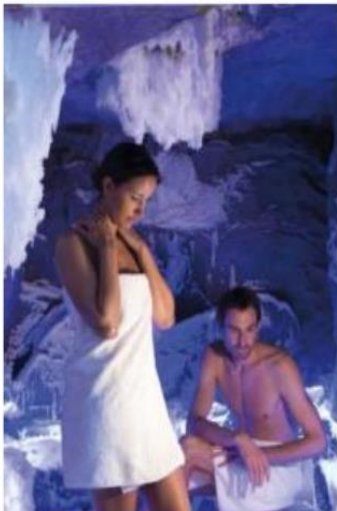

FRAGRANCE DISPENSER

- 1、 Working Time setting :30 minutes to 8 hours
- 2、 Temperature setting: 35–55°C (95–131 F)
- 3、 Protection of water shortage
- 4、 Over–high temperature protection
- 5、 Auto–draining
- 6、 Light system control
- 7、 Long distance signal transmission, the longest distance can be 50m
- 8、 Over–high pressure protection, prevent tank from expanding, in the case the steam head has been blocked
- 9、 The tank material is 304# stainless steel

TECHNICAL DETAILS

code	Steam generator model	Output kw	Lightweight wall of galass, plastic, Elysee/Excellent room etc.		Heavy wall of tiles concrete, stone etc.,		Steam production kg/h	Steam generator dimensions LxWxH
			with ventilation	without ventilation	with ventilation	without ventilation		
05001001001	WVA 6	6	3.8	4–15	2–5	2.5–8	8	445x130x405
05001002001	WVA 9	9	6–16	13–24	4–10	7–16	12	570x224x485
05001003001	WVA 12	12	14–22	22–30	8–15	14–20	16	570x224x485
05001004001	WVA 18	18	20–30	28–40	13–20	18–30	24	615x445x485
05001005001	WVA 24	24	28–40	38–50	18–30	28–40	32	615x445x485